


AFWNID-24 FIBER OPTIC (NID)

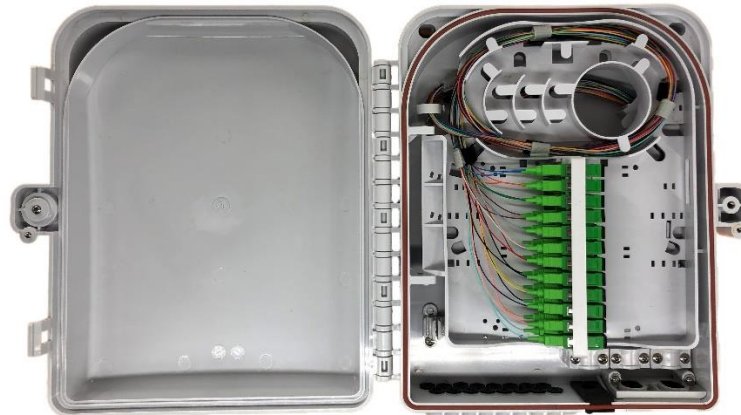

FEATURES

- For Wall or Pole Mount Applications
- IP65 Rated, Suitable for Indoor or Outdoor Use
- Bulkhead Panels for 24 SC Simplex/LC Duplex Adapters (SC Footprint)
- Integrated Splice Tray Accommodates Up To 24 Splices
- (2) 1" x 9/16" Cable Entry Ports for Input
- (16) 7/16" Diameter Cable Entry Ports for Output
- Integrated Cable Management and Slack Storage

The AFWNID-24 provides IP-65 protection for fiber optic terminations and splices. The enclosure is equipped with (2) large and (16) smaller ports for cable entry; grommets are included to ensure weather tight entry for small diameter cables. The enclosure accommodates (24) SC footprint adapter ports and features a built in, swing-out splice tray with a slack storage spool below. The AFWNID-24 is available unloaded or loaded with pigtailed and adapters.

SPECIFICATIONS

Model	AFWNID-12
Dimensions	13" H x 12" W x 5" D
Entry Points	18
Material	Weather Resistant Thermo Plastic
Suitable Cable Diameter	Up to 1" (25mm) Input, Up to 7/16" (11mm) Output
Splice Tray	24 Splices

ACCESSORIES

SC Simplex SM Adapter, Blue	AFAD2F2F
SC/APC Simplex SM Adapter, Green	AFAD5F5F
LC Duplex SM Adapter, Blue	AFAD4F4F-DU
LC Duplex MM Adapter, Aqua	AFAD4F4F-DU-10G-SC
LC/APC Duplex SM Adapter, Green	AFAD14F14F-DU
SC Simplex MM Adapter, Beige	AFAD2F2F-MM
LC Duplex MM Adapter, Beige	AFAD4F4F-DU-MM-SC