


AFWNID-6-MINI FIBER OPTIC (NID)

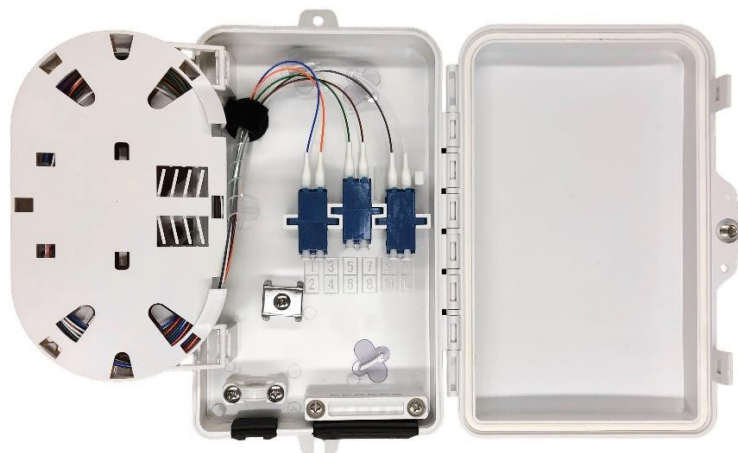

FEATURES

- For Wall Mount Applications
- Built In Swing-out Mini Splice Tray (6 Splices)
- Bulkhead Panel for 6 SC Simplex/LC Duplex Adapters (SC Footprint)
- IP66 Rated, Weather Tight Grommets
- 2 Entry Ports
- Suitable for Outdoor or Indoor Cable
- Integrated Cable Management

The AFWNID-6-MINI provides IP-66 protection for fiber optic terminations and splices. The enclosure is equipped with 2 grommets for cable entry. The enclosure accommodates (6) SC footprint adapters and features a built in, swing-out splice tray with provisions for slack storage. The AFWNID-6-MINI is available unloaded or with pigtails and adapters. Includes mounting hardware and splice sleeves.

SPECIFICATIONS

Model	AFWNID-6-MINI
Dimensions	7.4" x 4.6" x 1.6" (18.6 x 11.6 x 4.0 cm)
Entry Points	2
Material	UV Resistant ABS
Suitable Cable Diameter	Up to 12 mm
Splice Tray	6 Splices

ACCESSORIES

SC Simplex SM Adapter, Blue	AFAD2F2F
SC/APC Simplex SM Adapter, Green	AFAD5F5F
LC Duplex SM Adapter, Blue	AFAD4F4F-DU-SC
LC Duplex MM Adapter, Aqua	AFAD4F4F-DU-I0G-SC
LC/APC Duplex SM Adapter, Green	AFAD4F4F-DU-SCI
SC Simplex MM Adapter, Beige	AFAD2F2F-MM
LC Duplex MM Adapter, Beige	AFAD4F4F-DU-MM-SC