


AFRMIR-3x2 Rack Mount FDP

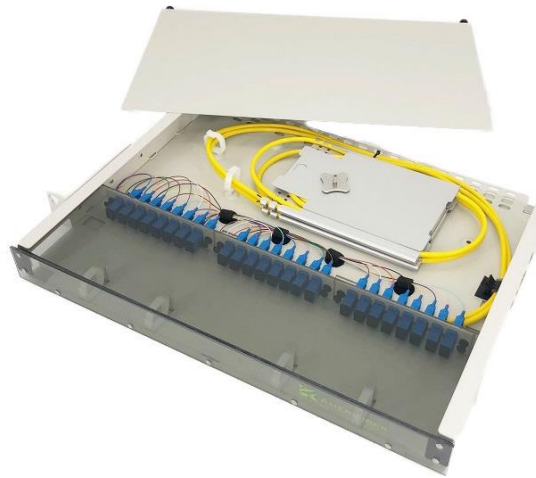

*Shown Loaded As 24 Port SC/UPC Patch and Splice.

FEATURES

- For Indoor Rack Mount Applications
- Powder Coated 16 Gauge Cold Rolled Steel (Beige or Black)
- Accommodates up to 48 Splices
- Bulkhead Panel for up to 36 SC or 72 LC Ports
- Integrated Cable Management
- Removable Acrylic Front Door

The AFRMIR-3x2 provides protection for fiber optic terminations and splices. The enclosure is equipped with 4 ports for cable entry. The enclosure accommodates (3) LGX style adapter plates and can be configured to house up to (36) SC footprint adapters and 48 splices when equipped with splice trays. The AFRMIR-3x2 is available fully loaded as a patch only, patch and splice, or can be equipped with a pre-terminated stub cable per the customer's specifications. The enclosure is configured for 19" racks; brackets are available to allow quick conversion for 23" racks.

SPECIFICATIONS

Model	AFRMIR-3x2
Dimensions	1.75"h X 17"w X 15"d
Material	16 Gauge Cold Rolled Steel
Maximum Termination Capacity	36 SC or 72 LC (Patch Only)
Splice tray Capacity When Equipped	48 Splices

ACCESSORIES

SC Simplex SM Adapter, Blue	AFAD2F2F
SC/APC Simplex SM Adapter, Green	AFAD5F5F
LC Duplex SM Adapter, Blue	AFAD4F4F-DU-SC
LC Duplex MM Adapter, Aqua	AFAD4F4F-DU-10G-SC
LC/APC Duplex SM Adapter, Green	AFAD4F4F-DU-SC I
SC Simplex MM Adapter, Beige	AFAD2F2F-MM
LC Duplex MM Adapter, Beige	AFAD4F4F-DU-MM-SC